TotalRecallVR LinX Virtualis

Virtual machine image for high capacity IP audio logging and call recording suitable for public and private clouds.

- ☑ 120 IP recording channels
- ☑ 60,000 audio hours recording storage at 64Kbps
- ☑ 900,000 recordings DB storage
- ☑ 3 activation licenses for PC applications
- ☑ 2 years warranty

Easily and securely record:

📞 Telephones

Record IP (or VoIP) telephones using SIP, SIPrec and Cisco® Built in Bridge (BiB).

📻 2-way Radio

Record analogue, RoIP, DMR, P25, NXDN radios and consoles (Omnitronics® RoIP, Tait® VRP and Hytera® HDAP, Zetron® RoIP).

🔊 Intercoms

Record IP intercoms and emergency help points using AoIP, SIP and SIPrec.

📡 Broadcast Radio

Record public broadcast radio using AoIP, RoIP and RTSP.

📢 Public Address

Record IP public address and announcement systems using AoIP, SIP, SIPrec and RTSP.

✈ Air Traffic Control

Records IP (or VoIP) air traffic management (ATM) and control (ATC) systems using ED-137.

TotalRecallVR LinX Virtualis

- ☑ 120 IP recording channels
- ☑ 60,000 audio hours recording storage at 64Kbps
- ☑ 900,000 recordings DB storage
- ☑ 3 activation licenses for PC applications
- ☑ 2 years warranty (3, 4 or 5 years optional)
- ☑ Complementary upgrades
- ☑ Complementary support

- ☑ VMware ESXi 6.5 or Workstation 14.x
- ☑ Oracle VirtualBox 5.x

- ☑ Reliable Linux® based platform
- ☑ Tamper proof file format
- ☑ Export to .mp3, .wav, .spx, .afic, .au ...
- ☑ Monitor, replay, reconstruct, search ...
- ☑ Choice of 10 value-add PC applications
- ☑ Multi-level access control
- ☑ APIs: REST, Java RMI, SIP, RTSP ...
- ☑ NTP clock, SNMP alarms, SMDR integration

- ☑ Reliable
- ☑ Affordable
- ☑ Secure
- ☑ Hybrid

TotalRecallVR LinX Virtualis

☑ **IP Recording Interface**

- Capacity: up to 120 concurrent sessions

- Interface: Ethernet, 2 x 1GBps, RJ45

- Protocols: SIP, SDP, RTP, SIPrec, Cisco® BiB, RTSP, ED-137, Tait® VRP, Hytera® HDAP, Omnitornics® RoIP, Zetron® RoIP

- Voice encoding:

  - G.711, 8000Hz, 64Kbps, mono

  - AMBE, 8000Hx, 2450bps, mono

  - PCM, 8000Hz, 128Kbps, mono

- Passive packet capture: via SPAN port

- Active packet capture: TCP, unicast & multicast UDP
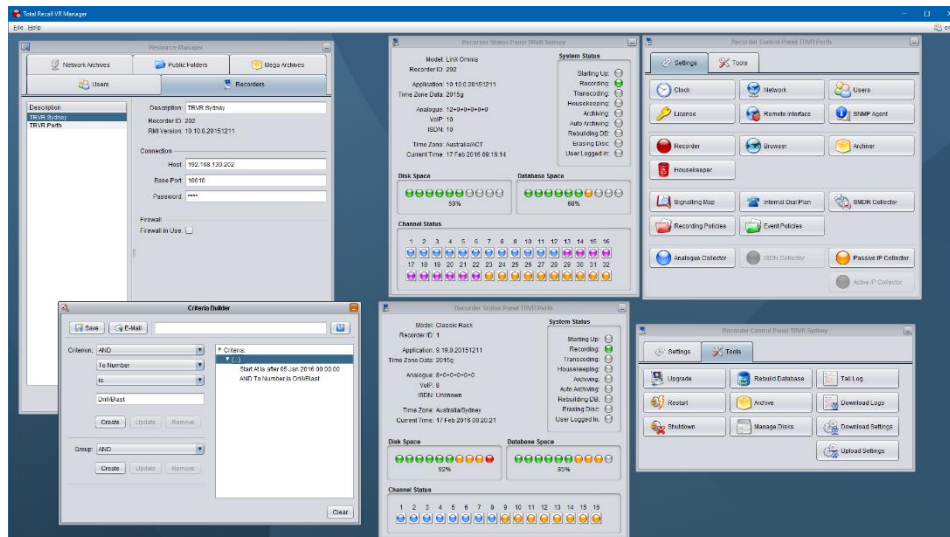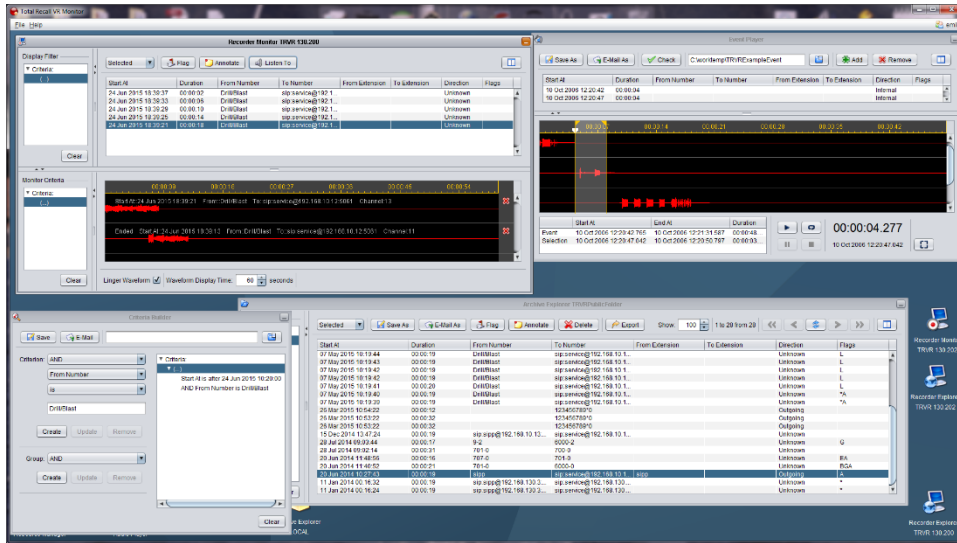
TotalRecallVR LinX Virtualis
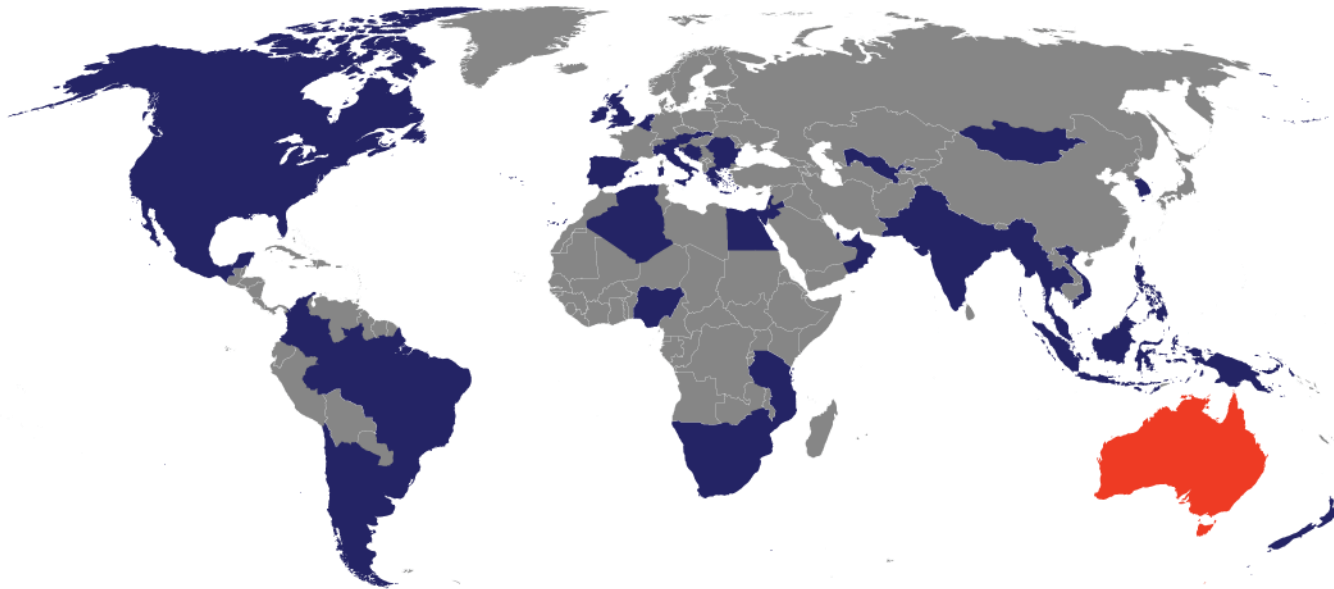
All Australian design, development and manufacturing.

Equally popular with enterprises, governments, utilities, infrastructure, militaries ... world wide.

trvr@prolancer.com.au

+61 2 8060 3311

Since 2005

Prolancer

QUALITY SYSTEM CERTIFICATION
DNV
ISO 9001

MADE IN AUSTRALIA

www.TotalRecallVR.com